

Safe Living Technologies Inc.
7 Clair Road West, P.O. Box 27051
Guelph, ON N1L 0A6, Canada
Tel: 519-240-8735
Fax: 519-821-5724
www.slt.co
support@slt.co

**Signal Protect
Clear**



Clear Glass

Formerly: **SLTWF1**


**Signal Protect
Silver**



Formerly: **SLTWF3**


Description	Clear	Clear	Reflective
Thickness	1/8 Inch Clear	3 mil (8mil optional)	2 mil
RF Power Attenuation			
Blocking Power:			
@ 60 MHz	0 dB 0%	-53 dB 99.999%	-54 dB 99.9996%
@ 100 MHz	0 dB 0%	-42 dB 99.99%	-43 dB 99.99%
@ 400 MHz	0 dB 0%	-36 dB 99.97%	-38 dB 99.98%
@ 1 GHz	0 dB 0%	-33 dB 99.95%	-34 dB 99.96%
@ 2 GHz	0 dB 0%	-38 dB 99.98%	-32 dB 99.94%
@ 4 GHz	0 dB 0%	-35 dB 99.97%	-40 dB 99.99%
@ 8 GHz	0 dB 0%	-30 dB 99.9%	-34 dB 99.96%
@ 14 GHz	0 dB 0%	-39 dB 99.987%	-34 dB 99.96%
% IR Light Blocked	NA	95+	90+
% UV Light Blocked	27	99+	99+
Total Solar Energy Rejected	15	55	76
Visible Light			
% Transmittance	90 - High	72 - High	22 - Low
% Reflectance Exterior	9 - Low	9 - Low	45 - High
% Reflectance Interior	9 - Low	9 - Low	43 - High
Available Widths		4 and 5 feet	4 and 5 feet
Minimum lengths		5 feet	5 feet
Additional length increments		5 feet	5 feet
Conversion 1 meter ² = 10.76 feet ²			

SLT- 1052

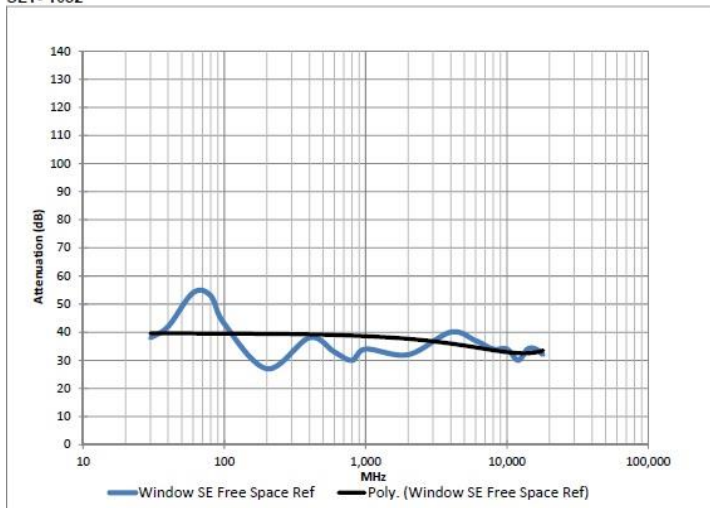

Signal Protect – Silver Film

SLT- 1053

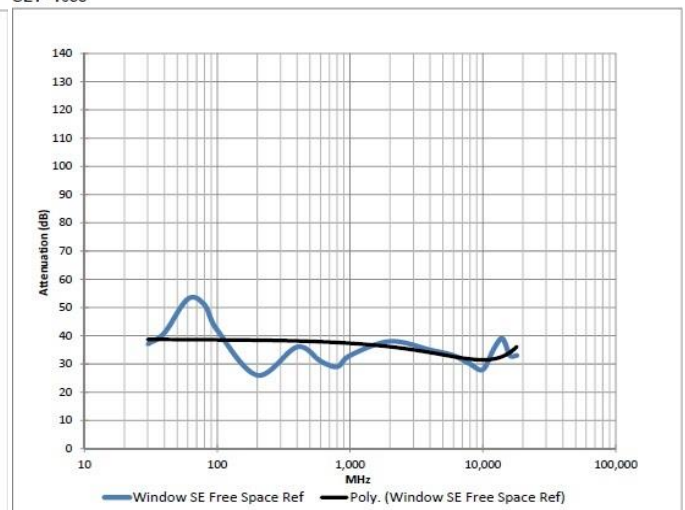

Signal Protect – Clear Film